

febi EXAKT

High precision quality



Tie rod end


fits AUDI A4, A6, A8 (ref. no. 4BO 419 811 E)
VW Passat (ref. no. 4BO 419 811 E)
Skoda Superb (ref. no. 4BO 419 811 E)

>> PROBLEM:

The ball joints on the tie rod ends cause noise whilst driving

>> CAUSE:

Premature failure due to overloaded joints of the old design (ref. no. 4BO 419 811 E). This version has been replaced and is no longer fitted by Audi, VW and Skoda.

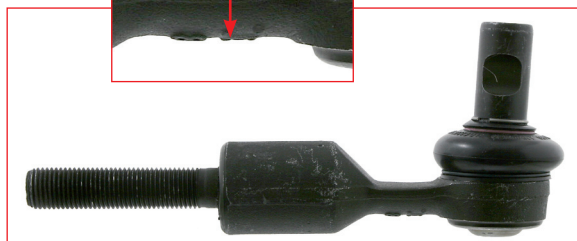

ref. no. 4BO 419 811 E



>> SOLUTION:


febi recommends the use of the tie rod end febi no. 22044 (ref. no. 8EO 419 811 B)

Features:

- Larger diameter to increase the load carrying capacity
- Sturdier body
- Snap ring is replaced by a flange to protect the rubber boot.



Important:

With the new design, the rubber remains in the body to ensure a comfortable driving experience and to prevent high-frequency vibrations being transferred to other parts.

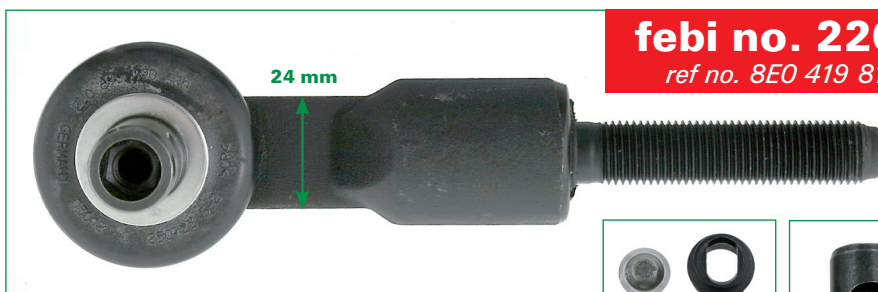

febi no. 22044

ref. no. 8EO 419 811 B

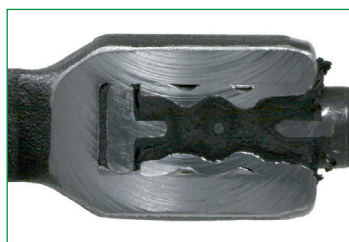

>> ATTENTION:

The use of unsuitable tools can cause premature failure of the joints. Please pay attention to the special requirements of the 4-joint-axle, in which these items are applied. While fitting, always follow the manufacturers' installation instructions!

Subject to technical alterations

febi UK Limited
Bilstein House, Green Lane Industrial Park
Featherstone | Pontefract | West Yorkshire WF7 6TA | Great Britain
Fon +44 1977 699777 | Fax +44 1977 707333
E-Mail sales@febiuk.co.uk

www.febi.com

bilstein group

