


DONNEES TECHNIQUES

Length [mm]	525
Number of splines (wheels side)	38
Number of Teeth, ABS ring	45
	for vehicles with ABS
ABS Ring Ø [mm]	81
Shape of the joint (gearbox side)	Star-form
ABS ring type	W
(wheels side) CV Joint Ø [mm]	98
(gearbox side) CV Joint Ø [mm]	90
Diam. ext. plate (A) [mm]	130
Number of mounting bores	6
Ø mounting holes [mm]	10

PHOTOS

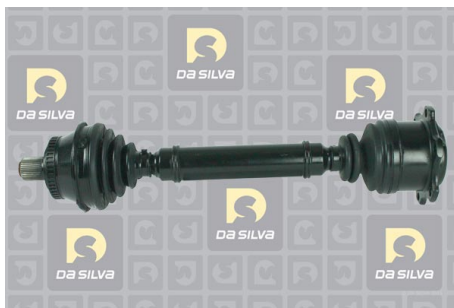


DOCUMENTS

BT-100	Conseils de montage des cardans
BT-104	Soufflets et Triaxes FIAT
BT-105	Soufflets et Triaxes SEAT
BT-131	Refus des carcasses transmissions

APPLICATIONS

AUDI		
A6 (97-04) (4B, C5) - 1.9 TDI	110 ch	02.1997 > 01.2005
	115 ch	07.2000 > 01.2005
A6 (97-04) (4B, C5) - 2.4	136 ch	07.1998 > 01.2005
	163 ch	02.1997 > 01.2005
	165 ch	02.1997 > 01.2005
A6 (97-04) (4B, C5) - 2.4 quattro	163 ch	02.1997 > 01.2005
	165 ch	02.1997 > 01.2005
	170 ch	08.2001 > 01.2005
A6 (97-04) (4B, C5) - 2.5 TDI	150 ch	07.1997 > 01.2005
	180 ch	02.2000 > 01.2005
A6 (97-04) Avant (4B, C5) - 1.9 TDI	110 ch	12.1997 > 01.2005
	115 ch	07.2000 > 01.2005
A6 (97-04) Avant (4B, C5) - 2.4	136 ch	07.1998 > 01.2005
	163 ch	12.1997 > 01.2005
	165 ch	12.1997 > 01.2005
A6 (97-04) Avant (4B, C5) - 2.5 TDI	150 ch	12.1997 > 01.2005
A8 (94-02) (4D2, 4D8) - 2.8	193 ch	04.1996 > 09.2002
A8 (94-02) (4D2, 4D8) - 2.8 quattro	174 ch	03.1994 > 03.1996
A8 (94-02) (4D2, 4D8) - 3.3 TDI quattro	224 ch	06.2000 > 09.2002

 Avant montage, comparez la pièce reçue à celle d'origine afin de vérifier que la bonne pièce a été choisie et peut être montée sur le véhicule. Le non-respect de cette consigne ou des instructions de montage annule la garantie.