


DONNEES TECHNIQUES

Length [mm]	560
Number of splines (wheels side)	28
Number of Teeth, ABS ring	50
	for vehicles with ABS
(wheels side) shoulder Ø [mm]	60
ABS ring type	R
(wheels side) CV Joint Ø [mm]	90
Number of splines (gearbox side)	27
(gearbox side) CV Joint Ø [mm]	82
	Coupling (gearbox side) not supplied
	Supplied without bearing (gearbox side)

PHOTOS

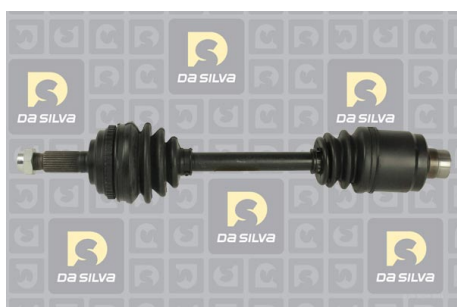


DOCUMENTS

BT-100	Conseils de montage des cardans
BT-104	Soufflets et Triaxes FIAT
BT-105	Soufflets et Triaxes SEAT
BT-131	Refus des carcasses transmissions

APPLICATIONS

ROVER		
600 (RH) - 618 i/Si	115 ch	03.1996 > 02.1999
600 (RH) - 620 i	115 ch	08.1993 > 06.1996
600 (RH) - 620 Si	131 ch	08.1993 > 02.1999
600 (RH) - 620 Ti Vitesse	200 ch	07.1994 > 02.1999
600 (RH) - 623 Si	158 ch	08.1993 > 02.1999

 Avant montage, comparez la pièce reçue à celle d'origine afin de vérifier que la bonne pièce a été choisie et peut être montée sur le véhicule. Le non-respect de cette consigne ou des instructions de montage annule la garantie.