


DONNEES TECHNIQUES

Length [mm]	904
Number of splines (wheels side)	26
Number of Teeth, ABS ring	44
	for vehicles with ABS
(wheels side) shoulder Ø [mm]	56
ABS ring type	R
(wheels side) CV Joint Ø [mm]	72
Number of splines (gearbox side)	24
(gearbox side) CV Joint Ø [mm]	70
(gearbox side) shoulder Ø [mm]	35

PHOTOS

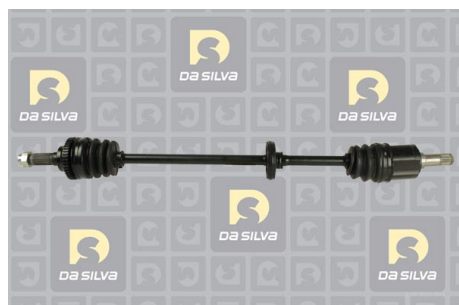


DOCUMENTS

BT-100	Conseils de montage des cardans
BT-104	Soufflets et Triaxes FIAT
BT-105	Soufflets et Triaxes SEAT
BT-131	Refus des carcasses transmissions

APPLICATIONS

MAZDA		
323 (85-89) Break (BW) - 1.6	86 ch	11.1989 > 10.1995
323 (85-89) Break (BW) - 1.7 D	56 ch	10.1989 > 03.1993
323 (89-94) C (BG) - 1.3	67 ch	09.1989 > 07.1994
323 (89-94) C (BG) - 1.3 16V	73 ch	09.1989 > 07.1994
323 (89-94) C (BG) - 1.6	84 ch	09.1989 > 06.1991
323 (89-94) C (BG) - 1.6 16V	88 ch	03.1991 > 10.1994
323 (89-94) C (BG) - 1.7 D	56 ch	08.1989 > 07.1994
323 (89-94) F (BG) - 1.6	84 ch	09.1989 > 06.1991
323 (89-94) F (BG) - 1.6 16V	88 ch	03.1991 > 10.1994
323 (89-94) S (BG) - 1.3	67 ch	09.1989 > 06.1991
323 (89-94) S (BG) - 1.3 16V	73 ch	04.1991 > 07.1994
323 (89-94) S (BG) - 1.6	84 ch	09.1989 > 06.1991
323 (89-94) S (BG) - 1.6 16V	88 ch	08.1989 > 10.1994
323 (89-94) S (BG) - 1.7 D	56 ch	08.1989 > 07.1994

 Avant montage, comparez la pièce reçue à celle d'origine afin de vérifier que la bonne pièce a été choisie et peut être montée sur le véhicule. Le non-respect de cette consigne ou des instructions de montage annule la garantie.