


DONNEES TECHNIQUES

Length [mm]	611
Number of splines (wheels side)	26
Number of Teeth, ABS ring	44
for vehicles with ABS	
(wheels side) shoulder Ø [mm]	56
ABS ring type	R
(wheels side) CV Joint Ø [mm]	83
Number of splines (gearbox side)	26
(gearbox side) CV Joint Ø [mm]	74

PHOTOS

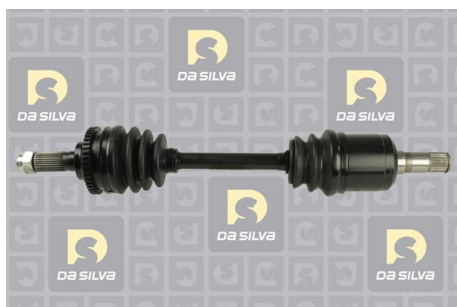


DOCUMENTS

- | | |
|---------------|--|
| BT-100 | Conseils de montage des cardans |
| BT-104 | Soufflets et Triaxes FIAT |
| BT-105 | Soufflets et Triaxes SEAT |
| BT-131 | Refus des carcasses transmissions |

APPLICATIONS

MAZDA		
323 (89-94) C (BG) - 1.8 16V	140 ch	09.1989 > 03.1993
323 (89-94) C (BG) - 1.8 16V 4WD	103 ch	11.1991 > 12.1993
323 (89-94) C (BG) - 1.8 16V GT	128 ch	09.1989 > 03.1993
323 (89-94) C (BG) - 1.8 16V Turbo 4WD	163 ch	09.1990 > 12.1992
	185 ch	01.1993 > 07.1994
323 (89-94) F (BG) - 1.8 4WD	103 ch	01.1991 > 04.1994
323 (89-94) F (BG) - 1.8 16V	103 ch	08.1989 > 07.1994
	140 ch	09.1989 > 03.1993
323 (89-94) F (BG) - 1.8 16V GT	128 ch	08.1989 > 07.1994
323 (89-94) S (BG) - 1.8 16V	103 ch	08.1989 > 07.1994
323 (89-94) S (BG) - 1.8 16V 4WD	105 ch	09.1991 > 07.1994
323 (89-94) S (BG) - 1.8 16V GT	128 ch	06.1989 > 07.1994
323 (89-94) S (BG) - 1.8 16V Turbo 4WD	163 ch	01.1991 > 07.1994
323 (94-98) F (BA) - 1.8 16V	114 ch	08.1994 > 09.1998
323 (94-98) S (BA) - 1.8 16V	114 ch	08.1994 > 09.1998

 Avant montage, comparez la pièce reçue à celle d'origine afin de vérifier que la bonne pièce a été choisie et peut être montée sur le véhicule. Le non-respect de cette consigne ou des instructions de montage annule la garantie.