


## DONNEES TECHNIQUES

Alternator Charge Current [A]	100
Vehicle Main Current	for vehicles with 12V main current
Type de poulie	PVR5
Belt Pulley Ø [mm]	56
Clamp	M8 B+
Plug Type ID	PLUG141

## PHOTOS

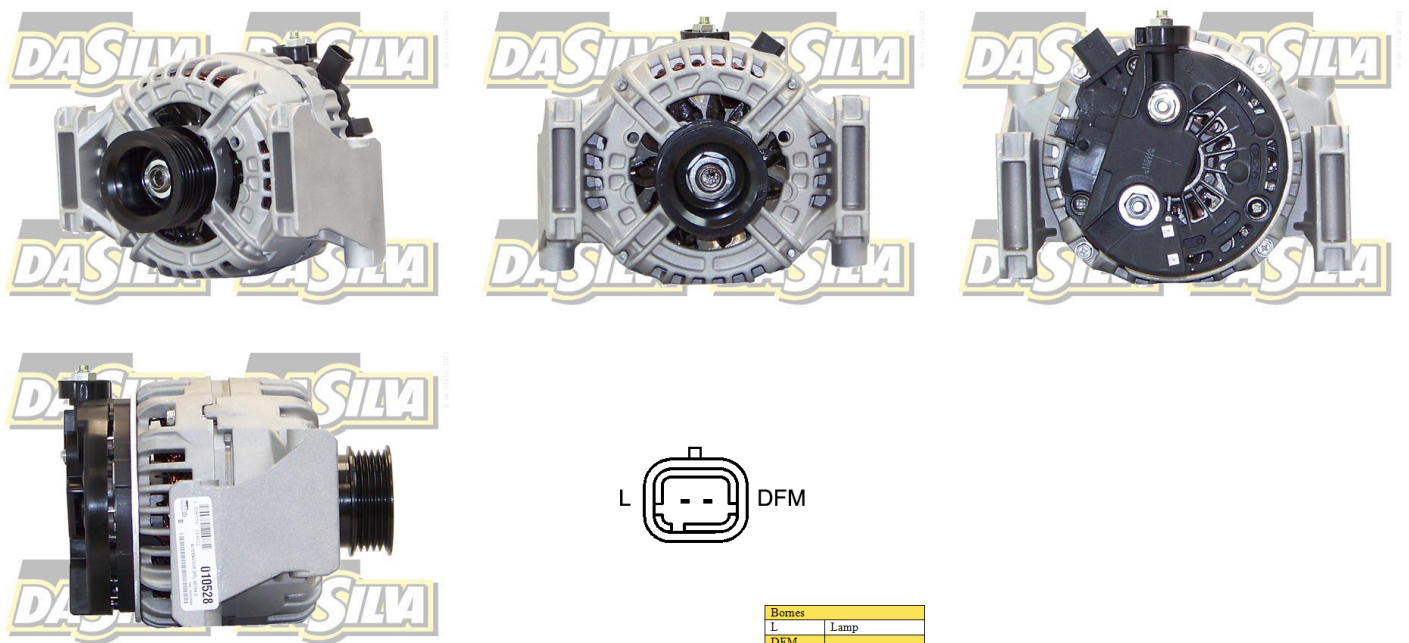


## DOCUMENTS

BT-130 Refus des carcasses alternateurs/démarrateurs

## APPLICATIONS

<b>OPEL</b>		
ASTRA G (98-05) 3 volumes (F69_) - 2.2 16V	147 ch	03.2001 > 01.2005
ASTRA G (98-05) Cabriolet - 2.2 16V	147 ch	03.2001 > 10.2005
ASTRA G (98-05) Caravan (F35_) - 2.2 16V	147 ch	03.2001 > 07.2004
ASTRA G (98-05) CC (F48_, F08_) - 2.2 16V	147 ch	03.2001 > 01.2005
ASTRA G (98-05) Coupe (F07_) - 2.2 16V	147 ch	09.2000 > 05.2005
SPEEDSTER - 2.2	147 ch	09.2000 >
VECTRA B (36_) - 2.2 i 16V	147 ch	09.2000 > 04.2002
VECTRA B Caravan (31_) - 2.2 i 16V	147 ch	09.2000 > 07.2003
VECTRA B CC (38_) - 2.2 i 16V	147 ch	09.2000 > 07.2003
VECTRA C - 2.0 16V Turbo	175 ch	03.2003 >
VECTRA C - 2.2 16V	147 ch	04.2002 >
VECTRA C Caravan - 2.0 Turbo	175 ch	10.2003 >
VECTRA C GTS - 2.0 16V Turbo	175 ch	03.2003 >
VECTRA C GTS - 2.2 16V	147 ch	08.2002 >
ZAFIRA A (99-06) (F75_) - 2.2 16V	147 ch	09.2000 > 06.2005

 Avant montage, comparez la pièce reçue à celle d'origine afin de vérifier que la bonne pièce a été choisie et peut être montée sur le véhicule. Le non-respect de cette consigne ou des instructions de montage annule la garantie.